

MT5N

430-450W

N-type HJT Bifacial Black Frame
Dual Glass Solar Module


Qualidade Garantida

25-Year Warranty for Materials and Processing

30-Year Warranty for Extra Linear Power Output

23.04%

Max. Module Efficiency

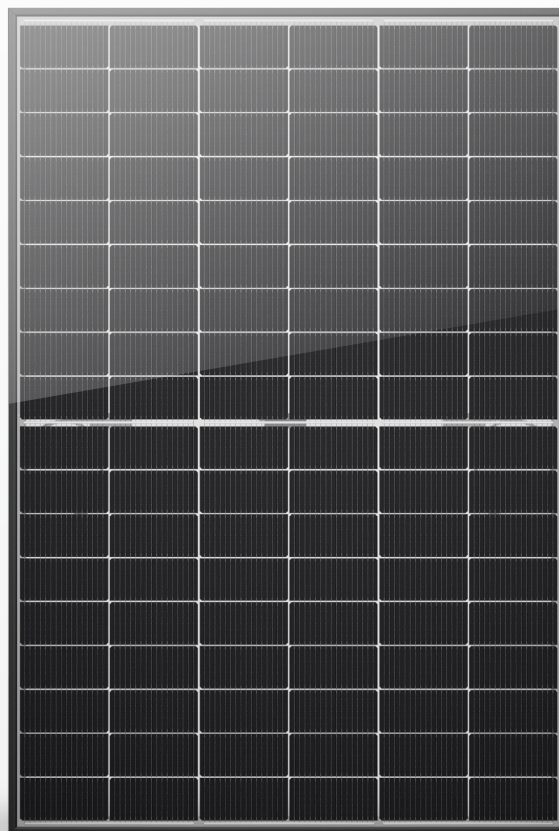

MS-54HB

HJT 2.0 Technology

Combining gettering process and single-side uc-Si technology to ensure higher cell efficiency and higher module power.

-0.26%/°C Pmax temperature coefficient

More stable power generation performance and even better in hot climate.

SMBB design with Half-Cut Technology


Shorter current transmission distance, less resistive loss and higher cell efficiency.

Up to 90% Bifaciality

Natural symmetrical bifacial structure bringing more energy yield from the backside.

Sealing with PIB based sealant

Stronger water resistance, greater air impermeability to extent module lifespan.

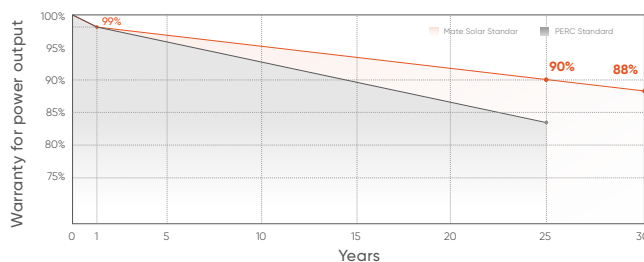

* Please refer to Mate Solar standard warranty for details

Quality Management System And Product Certification

IEC61215/61730, IEC62804(PID), IEC61701(Salt).

IEC62716 (Ammonia), IEC60068-2-68(Sand).

ISO 9001:2015/quality management system.

ISO 14001:2015/environmental management system.


ISO 45001:2018/occupation health safety management system

ISO 50001:2011/energy management system.

IEC TS 62941-2016/PV industry quality management system .



Drawings

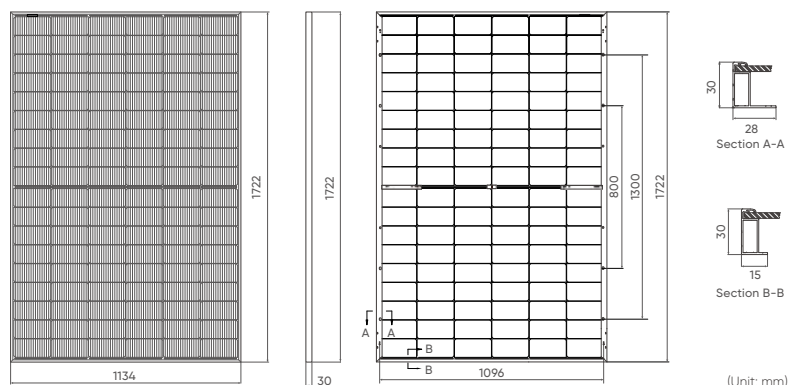

Mechanical Parameters

Solar Cells	N-type HJT
No. of Cells	108 (6×18)
Dimensions	1722 × 1134 × 30mm
Weight	23.5kg
Front Glass	Front: 2.0mm coated semi-tempered glass; Back: 2.0mm semi-tempered glass
Frame	Anodized aluminium alloy
Junction Box	Ip68 rated (3 by pass diodes)
Output Cables	4mm ² , 300mm (+) / 300mm (-), Length can be customized
Connectors	Mc4 compatible
Mechanical load test	5400Pa
Packaging	36pcs/box, 216pcs/20'GP, 936pcs/40'HQ

Electrical Characteristics (STC*)


Module Type: MS-54HB	430	435	440	445	450
Maximum power (Pmax/W)	430	435	440	445	450
Open Circuit Voltage (Voc/V)	40.30	40.56	40.83	41.09	41.34
Short Circuit Current (Isc/A)	13.30	13.35	13.40	13.45	13.50
Voltage at Maximum power (Vmpp/V)	33.49	33.75	34.01	34.26	34.51
Current Maximum Power (Impp/A)	12.84	12.89	12.94	12.99	13.04
MODULE EFFICIENCY (%)	22.02	22.28	22.53	22.79	23.04

Electrical Characteristics (NMOT*)

5%	Maximum power (Pmax/W)	452	457	462	467	473
	Module Efficiency STC (%)	23.12	23.39	23.66	23.93	24.20
15%	Maximum power (Pmax/W)	495	500	506	512	518
	Module Efficiency STC (%)	25.32	25.62	25.91	26.21	26.50
25%	Maximum Power (Pmax/W)	538	544	550	556	563
	Module Efficiency STC (%)	27.53	27.85	28.17	28.49	28.81

1. Standard Test Conditions [STC]: irradiance 1000W/m²; AM 1.5; ambient temperature 25°C according to EN 60904-3;
 2. Tolerance of Pm: 0~+5W, Measuring uncertainty of power: ±3%. Performance deviation of Voc [V], Isc [A], Vm [V] and Im [A]: ±3%.

Product Image

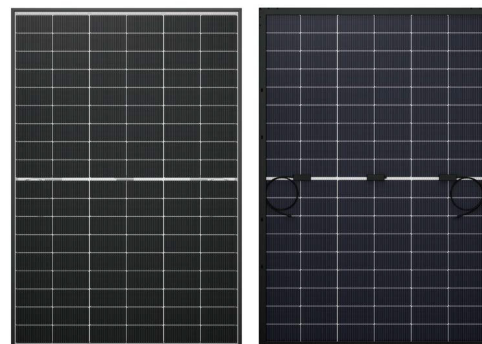

Operating Characteristics

Operating Module Temperature	-40°C to +85°C
Maximum System Voltage	1500 DC (IEC)
Maximum Series Fuse Rating	30A
Power Tolerance	0/+5W

Temperature Characteristics

Nominal Operating Temperature (NMOT)	44±2°C
Temperature Coefficient of Pmax	-0.26%/°C
Temperature Coefficient of Voc	-0.24%/°C
Temperature Coefficient of Isc	+0.04%/°C

I-V CURVE

